


RAILSQUID **Hylío AG216**

WEED SPRAY SYSTEM

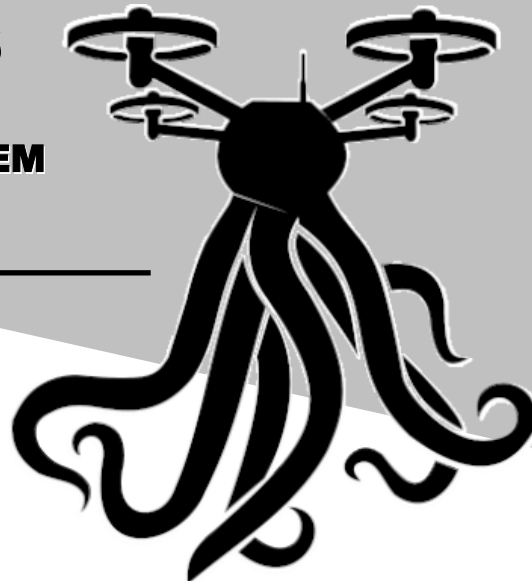

EQUIPMENT SPECIFICATIONS

Flight Parameters

Total Weight (without batteries)	35 lb
Max Recommended Takeoff Weight	105 lb
Max Thrust	202.2 lbs
Max Operating Speed	25 mph

Propulsion System

Motor KV	100 rpm/V
Foldable Propeller	30 x 9.0 in
Configuration	Hexacopter
Operating Voltage	12s
Battery	1 x 22000 mAh 12S (44.4V) LiPo Battery 13.4 lb/battery

Aircraft Frame—Hylío AG210

Wheelbase	67 in
Material	Carbon Fiber, Aluminum, Plastic
Dimensions	67 x 59 x 24 (arms unfolded) 35x42x24 (arms folded)

Spray System

Max Payload	35lbs 4.5 gallons
Configuration	Carbon Fiber, Aluminum, Plastic
Configuration	1 Pumps, 1 tank, 1 flowmeter, 6 nozzles - or 4 on 30ft Railsquid
Nozzle	Nozzle body compatible with any Teejet spray tip
Pump Pressure	Diaphragm Pump, 75psi
Flow Rate (no nozzle max)	0.1—1.8 Gal/min or .95Gal/min with recommended nozzle
Spray Width	10—20 feet (Normal Config) Varies on nozzle (Railsquid Config)

Flight Controls

Flight Modes	Fully autonomous (no RC) position hold manual (with RC)
Operating Frequencies	902—928 MHz, 2.4 Ghz
Ground Station Control Software	Hylío AgroSol GCS
Max Transmission Range	~1 mile (5+ unobstructed)

The RailSquid Spray System is built on the Hylío AG-210 UAS and for sale exclusively from Iron Compass Consulting LLC



CALL TO LEARN MORE
307-421-0342

